


# LED Undercabinet

- Dual Kelvin Color-Select 3000/4000K
- Powder-coated finish
- Polycarbonate opal plastic diffuser
- High color rendering chip for vivid, true color
- Linkable up to 20 units
- Includes plug-in cord, hard wire connection and 6" linking wire and butt connector
- 12" linking cord (UL512LINK) sold separately
- 3-year limited warranty

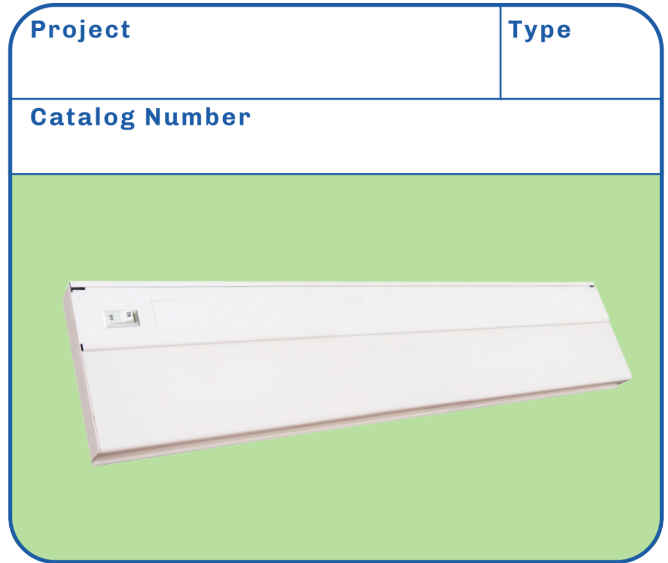

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 25,00Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥90  
 Dimmable \_\_\_\_\_ Triac 120V

## DIMENSIONS

UL095DXX \_\_\_\_\_ 9.19" x 5" x 1.125"  
 UL125DXX \_\_\_\_\_ 12.19" x 5" x 1.125"  
 UL185DXX \_\_\_\_\_ 18.5" x 5" x 1.125"  
 UL245DXX \_\_\_\_\_ 24.63" x 5" x 1.125"  
 UL335DXX \_\_\_\_\_ 33.56" x 5" x 1.125"  
 UL425DXX \_\_\_\_\_ 42.63" x 5" x 1.125"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
5	UL095DWH	250	3/4000K	120	25W HAL
6	UL125DWH	300	3/4000K	120	50W HAL
9	UL185DWH	500	3/4000K	120	75W HAL
11	UL245DWH	650	3/4000K	120	100W HAL
13	UL335DWH	750	3/4000K	120	125W HAL
16	UL425DWH	850	3/4000K	120	150W HAL
ACCESSORIES:		UL512LINK			
NOTES:					

Manufactured by

